



# DUST EXTRACTION

Product range

**FESTOOL**  
Tools for the toughest demands

# Mobile dust extractors from Festool.

## Moving cleaning forward.

Clean work is important: to protect health, to make a good impression with customers, and to keep everything running smoothly for precise work results. To achieve this, thorough final cleaning is not enough; you also need effective dust extraction as the electric or air tool is being used. That's why we made dust extractors into an integral component of the Festool system years ago, and why we continue our rigorous development of that component – through our new special application dust extractors, for example.

What really sets our products apart is often the small details. Such as typical Festool innovations like the hose garage, which does away with annoying hooks on the outside of the container. Or the Sys-Dock for connecting SYSTAINERs, for more space and better organisation. A suction hose which is optimised to a diameter of 27 mm, able to suck up bulkier material but also considerably more flexible. Or infinitely variable suction power adjustment, and fitted-as-standard automatic switch-on/shut-off for fast, clean work.

Our goal in all this is to create dust extractors which speed up work processes. Extractors which are light and sturdy, with a lot of capacity in compact dimensions, and which provide cleaning you can rely on, both during and after the job. And of course, we aim to become even better in the future as well.

### Contents

▶ Systems get it done	04
▶ Mobile dust extractors CT MINI/CT MIDI	06
▶ Mobile dust extractors CLEANTEX CT 26   CT 36   CT 48	08
▶ Special application dust extractors CLEANTEX AC   CT AC-PLANEX	10
▶ Special application dust extractor CLEANTEX CTH 26   CTH 48	12
▶ Special application dust extractor CLEANTEX CT 48 LE EC	14
▶ Special application dust extractor CLEANTEX CT 48 LE EC/B22	16
▶ Overview of all Festool mobile dust extractor models	18
▶ Festool filter bags	19
▶ Accessories and consumables	20
▶ Package contents and order numbers	22





**AUTOCLEAN technology**  
Less work and constant suction power: the AUTOCLEAN automatic cleaning system makes manual cleaning of the main filter a thing of the past. With infinitely variable adjustment of the cleaning intervals and suction power, immaculate results are guaranteed in virtually any situation.



**Use maximum capacity of the Container**  
Perfectly coordinated components create an optimum of space for any amount of dust. The carefully designed shape of the dust container together with the precisely matched SELF-CLEAN filter bag and space-saving flat filter produce a net volume that is equal to the gross volume.



**Sys-Dock and hose garage**  
Festool innovations: the Sys-Dock for connecting SYSTAINERS for easy transport of tools and accessories. Or the unique, built-in hose garage with cord holder, which also doubles as a temporary storage point for tools in use.



**"Made in Germany" quality**  
Many of our tools have been in use for more than 30 years. That isn't the result of chance, but rather a logical consequence of the painstaking development and production you expect from German-made products. Products backed by our promise: tools for the toughest demands.





Because things **work better** when everything fits together.



## Systems get it done.

If you want to be good, you need perfect tools. If you want to be better, you need a system. A system in which accessories and consumables go hand in hand with the tools, which guarantees better order and organisation, and which provides extra added value for every investment made.

A system with just one goal: to achieve success quickly, easily and with a better result.

## System = added value

Many Festool mobile dust extractors are fitted as standard with a hose garage, Sys-Dock for attaching SYSTAINERS and a modular plug-in slot. They can be optionally expanded by adding a handle or a detachable tool holder. What's more, not only are they compatible with all Festool electric and air tools, their diverse range of accessories is also fully interchangeable.



### System = seamless work process

To achieve smooth work processes, every detail is important. Festool dust extractors help by guaranteeing a clear view of the working surface. The "plug it" hose speeds up processes by allowing lightning-fast tool change. The "plug it" hose with integrated power cable improves handling. And when working with the guide rail, a deflector ensures that the suction hose cannot get caught.

### System = better organised

Festool's mobile dust extractors don't just help to keep things clean, they also make it easier to keep things in order. The Sys-Dock allows SORTAINERS and SYSTAINERS to be attached securely to the dust extractors. When combined with a Workcenter\* or Toolcenter\* they become a mobile workstation. And when used together with the EAA energy box or the boom arm, their operating radius in the workshop is expanded immensely.

\* Not for CT MINI/MIDI

## Mobile dust extractors CT MINI | CT MIDI

### Ideal when **on the move.**

Dust class

L

Tools

Electric

Compact and light: these features make the CT MINI and CT MIDI dust extractors the ideal companions for assembly, installation or renovation work. When working with electric power tools or for final cleaning, to vacuum up dust or water.

- ▶ Ever present – with their low weight and compact dimensions, the CT MINI and CT MIDI are easy to transport
- ▶ The power of the system – CT MINI and CT MIDI are equipped with the same high-power turbine as the big CLEANTEX models
- ▶ Systematic expansion – tools and accessories in a SYSTAINER can be attached in an instant with the Sys-Dock
- ▶ Stable and safe – the locking brake keeps the dust extractor firmly in one place
- ▶ Optimum utilisation of container capacity – with a flat filter and smooth inner surfaces



CT MINI | CT MIDI

Technical data	CT MINI	CT MIDI
Power consumption		400-1200 W
Airflow max.		3700 l/min
Max. vacuum		24000 Pa
Filter surface area		5000 cm <sup>2</sup>
Rubber-insulated mains cable		7.5 m
Container/Filter bag capacity	10/7.5 l	15/12.5 l
Dimensions (L x W x H)	440 x 340 x 420 mm	440 x 340 x 470 mm
Maximum wattage of connected tool		2400 W
Weight	8.7 kg	9.0 kg

Package contents | order numbers from page 22





System accessories and consumables from page 22



Hose and power cable are protected in the built-in hose garage.



Quick, easy replacement of main filter and filter bag, no tools required.



Attention to detail – the separate storage compartment for spare filter bags.

## The perfectly sized **all-rounder**.

**Dust class**

L, M

**Tools**

Electric  
Air (module)

Compact, but also big. Light, but still powerful. Whether on a building site or in the workshop – with the finely adjusted shape of its dust container, the CLEANTEX offers big internal capacity despite small external dimensions. Three different sizes provide the right model for every need.

- ▶ Space-saving flat filter – gross volume is equal to net volume
- ▶ Suitable for any job – the CT series is available for dust classes M and L and can be customised by adding an extra electrical outlet (for continuous power or with automatic switch-on/shut-off), a compressed air module, or a module for connection to an energy box (EAA)
- ▶ Extremely small, extremely strong – compact high-power turbine with high suction power
- ▶ Tidy and secure – with cord holder, Sys-Dock for SYSTAINERS of sizes 1-5 and the hose garage, which doubles as a temporary storage point for tools in use
- ▶ Self-cleaning and tear-resistant – the sturdy non-woven filter bags collapse when the dust extractor is switched off, shaking off the dust



CT 26 | CT 36 | CT 48



Technical data	CT 26	CT 36	CT 48
Power consumption		350-1200 W	
Airflow max.		3900 l/min	
Max. vacuum		24000 Pa	
Filter surface area		6318 cm <sup>2</sup>	
Rubber-insulated mains cable		7.5 m	
Container/Filter bag capacity	26/24 l	36/34 l	48/46 l
Dimensions (L x W x H)	630 x 365 x 540 mm	630 x 365 x 596 mm	740 x 406 x 1005 mm*
Maximum wattage of connected tool		2400 W	
Weight	13.9 kg	14.4 kg	18.8 kg

\* Handle included | Package contents | order numbers from page 22





## System accessories and consumables from page 22



The Festool module system.  
Prepared for any task.




The CLEANTEX features a modular plug-in system which can be perfectly tailored to suit your specific task.

1. Compressed air module
2. Energy box module
3. Second electrical outlet with continuous power or automatic switch-on/shut-off

Safe and durable – with locking brake, sturdy steel rear axle and large abrasion-resistant wheels which transport the CLEANTEX safely without tipping, even up and down stairs.



Suction power [%]

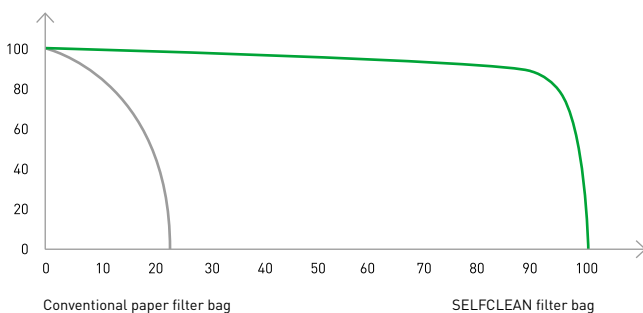

- CLEANTEX CT 36 with SELF-CLEAN filter bag
- Dust extractor with conventional paper filter bag

Dust volume [%]

Source: Festool testing laboratory; test conducted with fine dust



Uncompromising – constant high suction power and up to four times more fine dust with the SELF-CLEAN filter bag.

SELF-CLEAN filter bag – dust won't cake on the sides, keeping suction power constant right up until the bag is full.

Mobile dust extractors CLEANTEX CT 26 AC | CT 36 AC |  
 CT 36 AC-PLANEX | CT 48 AC

## Fully automatic filter cleaning system.

Dust class

L, M

Tools

Electric  
 Air (module)

The perfect weapon against clogged filters: the new CLEANTEX AUTOCLEAN. With automatic filter cleaning and constant, powerful suction, even in the basic models.

We've also developed the CT 36 AC-PLANEX special application dust extractor for the extremely high amount of dust generated by the PLANEX long-reach sander – with tool holder, sturdy kink-resistant hose, and ComfortClean closing slide fitted as standard.

- ▶ Space-saving high-power turbine, high-performance flat filter, full utilisation of container capacity
- ▶ Infinitely variable adjustment of cleaning intervals – from 15 seconds up to 2 minutes
- ▶ Absolutely clean – with the waste bag (available as an accessory) you'll virtually never come in contact with the dust
- ▶ The M model meets the requirements prescribed for extraction of dust from mineral putty and filler materials

NEW



CT AC | CT AC-PLANEX



product  
 design  
 award  
 2009

Technical data	CT 26 AC	CT 36 AC   CT 36 AC-PLANEX	CT 48 AC
Power consumption		350-1200 W	
Airflow max.		3900 l/min	
Max. vacuum		24000 Pa	
Filter surface area		6318 cm <sup>2</sup>	
Rubber-insulated mains cable		7.5 m	
Container/Filter bag capacity	26/24 l	36/34 l	48/46 l
Dimensions (L x W x H)	630 x 365 x 540 mm	630 x 365 x 596 mm	740 x 406 x 1005 mm*
Maximum wattage of connected tool		2400 W	
Weight	14.7 kg	15.2 kg	19.6 kg

\* Handle included | Package contents | order numbers from page 22




**System accessories and consumables from page 22**

**New Technology:  
CLEANTEX AUTOCLEAN**

The automatic filter cleaning system keeps the filter clear and the suction power constantly high.

The cleaning intervals can be adjusted infinitely within the range from 15 seconds up to two minutes: short for large quantities of dust, long for small quantities of dust.

Immediate cleaning can be triggered at any time between the set intervals.



The valve is opened magnetically for the set cleaning intervals. The vacuum in the container draws air through the filter, accumulated dust comes loose and falls into the container.



Extreme vacuum for extreme cleaning – the filter is cleaned even more thoroughly with the ComfortClean closing slide.

When AC one-off cleaning is switched on, the filter is immediately cleaned several times. When vacuuming liquids, filter cleaning can be switched off completely.



Special application dust extractor CLEANTEX CTH 26 | CTH 48

## Hazardous dust doesn't stand a chance.

**Dust class**

H

**Tools**

Electric  
Air (module)

Asbestos, mould, fibrous mineral dust, cadmium, lead, nickel, zinc chromate. Many hazards – one answer: carcinogenic and pathogenic dusts don't stand a chance against Festool's CTH special application dust extractor. With a 99.995%\* degree of filtration there is no danger to health, even during mould and asbestos removal or when working on wood treated with hazardous protective agents.

- ▶ Health protection – approved for dust classes M and H, meaning it is specially designed for carcinogenic and pathogenic dusts
- ▶ Securely sealed – with the two-layer safety filter bag
- ▶ Lots of space, lots of power – with the flat filter and high-power turbine
- ▶ Smooth power delivery – with infinite suction power control and with antistatic function as well
- ▶ Fixed installation or mobile – available in sizes 26 or 48

NEW



CTH 26 | CTH 48

Technical data	CTH 26	CTH 48
Power consumption		350-1000 W
Airflow max.		3900 l/min
Max. vacuum		24000 Pa
Filter surface area		6318 cm <sup>2</sup>
Rubber-insulated mains cable		7.5 m
Container/Filter bag capacity	26/24 l	48/46 l
Dimensions (L x W x H)	630 x 365 x 540 mm	740 x 406 x 1005 mm**
Wattage of connected tool		Max. 2400 watts
Weight	13.9 kg	18.8 kg

\* Product meets the requirements for design approval for dust class H, see page 23 \*\* With handle Package contents | order numbers from page 22



System accessories and consumables from page 22



For ease of handling – the handle makes it easy to push the CTH 48 to its place of use.



A two-layer safety filter bag is provided for dust-free disposal.



Special application dust extractors with system connections – SYSTAINERS can be easily docked to the CTH too.

## Special application dust extractor CLEANTEX CT 48 LE EC

# Made for long-term industrial use.

### Dust class

L, M

### Tools

Electric  
Compressed air

Designed especially for long-term, heavy-duty use – just like its EC-TEC drive system, which guarantees more reliability, durability and exceptional energy efficiency. For lasting suction power when working on plastic, ceramic, wooden or painted surfaces.

- ▶ Lasting strength – thanks to innovative EC-TEC drive with up to ten times longer life compared to conventional universal motors
- ▶ Variable to suit any job – available for dust classes L or M
- ▶ Solid connections – fitted as standard for connection to an energy box, and with compressed air port and Sys-Dock
- ▶ Flexible power – suction power adjustment allows the CT 48 LE EC to adapt to every work situation
- ▶ No chance of electrostatic discharge – thanks to antistatic function



NEW

CT 48 LE EC

Technical data	CT 48 LE EC
Power consumption	150-1100 W
Airflow max.	3400 l/min
Max. vacuum	23000 Pa
Filter surface area	6318 cm <sup>2</sup>
Rubber-insulated mains cable	7.5 m
Container/Filter bag capacity	48/46 l
Dimensions (L x W x H)	630 x 406 x 640 mm
Wattage of connected tool	Max. 2400 watts
Weight	17.9 kg

Package contents | order numbers from page 22





## System accessories and consumables from page 22



Huge capacity – the smooth, easy-to-clean inner surface of the container and the flat filter mean that the net volume is the same as the gross volume.



EC-TEC – the name of Festool's wear-free drive system, which is brushless and therefore free of maintenance and extremely robust.

## Special application dust extractor CLEANTEX CT 48 LE EC/B22

### For the **greatest possible safety.**

#### Dust class

L, M

#### Tools

Electric  
Compressed air

The specialist for the extraction of combustible and explosive dust: special application dust extractor CT 48 LE EC/B22. With its EC-TEC drive, it is ready for long-term continuous use. Its sturdy ABS plastic container is fitted with additional flame retardance, making it suitable for the safe extraction of aluminium, paper, soot and powder coating dusts, and even glass- and carbon-reinforced plastics.

- ▶ Complies with ATEX directive for Zone 22 – for safe disposal of dusts in explosion classes ST1, ST2 and ST3
- ▶ Perfect utilisation of space – the compact, rectangular shape ensures optimum filling of the filter bag
- ▶ Practical in application – this special application dust extractor needs no separate transport equipment; as with all CLEANTEX models, its wheels are sturdy, easily steered and directly fitted to the container
- ▶ Systems as standard – standard model comes fitted for connection to an energy box, and with compressed air port and Sys-Dock
- ▶ Antistatic function – an antistatic hose, stainless steel tubes and nozzles are available as accessories to prevent electrostatic discharge



NEW



CT 48 LE EC/B22

Technical data	CT 48 LE EC/B22
Power consumption	150-1100 W
Airflow max.	3400 l/min
Max. vacuum	23000 Pa
Filter surface area	6318 cm <sup>2</sup>
Rubber-insulated mains cable	7.5 m
Container/Filter bag capacity	48/46 l
Dimensions (L x W x H)	630 x 406 x 640 mm
Wattage of connected tool	Max. 2400 watts
Weight	18.6 kg

Package contents | order numbers from page 22



**System accessories and consumables from page 22**



More safety – the recessed electrical outlet and surface free of indentations minimises the risk of explosive dust deposits forming.



Festool mobile dust extractors and special application dust extractors

## All models at a glance.

### Ideal when on the move.

#### CT MINI/MIDI

Compact and light: ideal for assembly, installation and renovation work.



### The perfectly sized all-rounder.

#### CLEANTEX CT 26/36/48

In three sizes to suit every need: the all-rounder for the building site or workshop.



### Fully automatic filter cleaning system.

#### CLEANTEX CT 26/36/48 AC | CT 36 AC-PLANEX

With automatic, infinitely adjustable AUTOCLEAN filter cleaning for constant suction power: perfect for large quantities of dust.



### Hazardous dust doesn't stand a chance.

#### CLEANTEX CTH 26/48

99.995% degree of filtration: specially designed for the extraction of carcinogenic and pathogenic dusts.



### Made for long-term industrial use.

#### CLEANTEX CT 48 LE EC

With durable EC-TEC drive system: for long-term, heavy-duty use and for semi-stationary operation in connection with an EAA energy box.



### For the greatest possible safety.

#### CLEANTEX CT 48 LE EC/B22

Safe and robust EC-TEC motor and container in ABS plastic with flame retardance: the specialist for work with combustible and explosive dust.





## Festool filter bags

# Pure quality every time.

For every Festool mobile dust extractor, there is a matching filter bag, designed for the relevant dust class and material to be extracted:

- ▶ **SELCLEAN filter bag:** For disposable use with all kinds of dust. Prevents dust from caking on the sides through its self-cleaning effect, and is sealed before disposal for maximum health protection.
- ▶ **Longlife filter bags:** Re-usable due to its high-strength, three-ply non-woven polyester material. Ideal for large quantities of dust of class L. Easy to empty by opening the sealing strip.
- ▶ **Waste bag:** Perfect for dust extractors with AUTOCLEAN, e.g. for use with the PLANEX long-reach sander or for extraction of coarse waste and chips. Low-dust disposal thanks to a seal on the waste bag.
- ▶ **Two-layer safety filter bag:** A requirement for dust of class H. Extra safe, with an additional waste bag which encloses the non-woven filter bag.

Dust extractor	Approved for	Filter bags			
		Dust class	SELCLEAN	Longlife	Waste bag
CT MINI/CT MIDI	L	●			
	M	●			
CT 26	L	●	○		
	M	●	○		
CT 26 AC	L	○	○	●	
	M	○	○	●	
CT 36	L	●	●		
	M	●	○		
CT 36 AC	L	○	○	●	
	M	○	○	●	
CT 48	L	●	●		
	M	●	○		
	H				●
CT 48 AC	L	○	○	●	
	M	○	○	●	
CT 48 LE EC	L	●	●		
	M	●	○		
CT 48 LE EC/B22	L	●			
	M	●			


● Compatible and recommended

○ Possible, but with limitations

Package contents | order numbers from page 22

Mobile dust extractors and special application dust extractors

# Accessories and consumables.

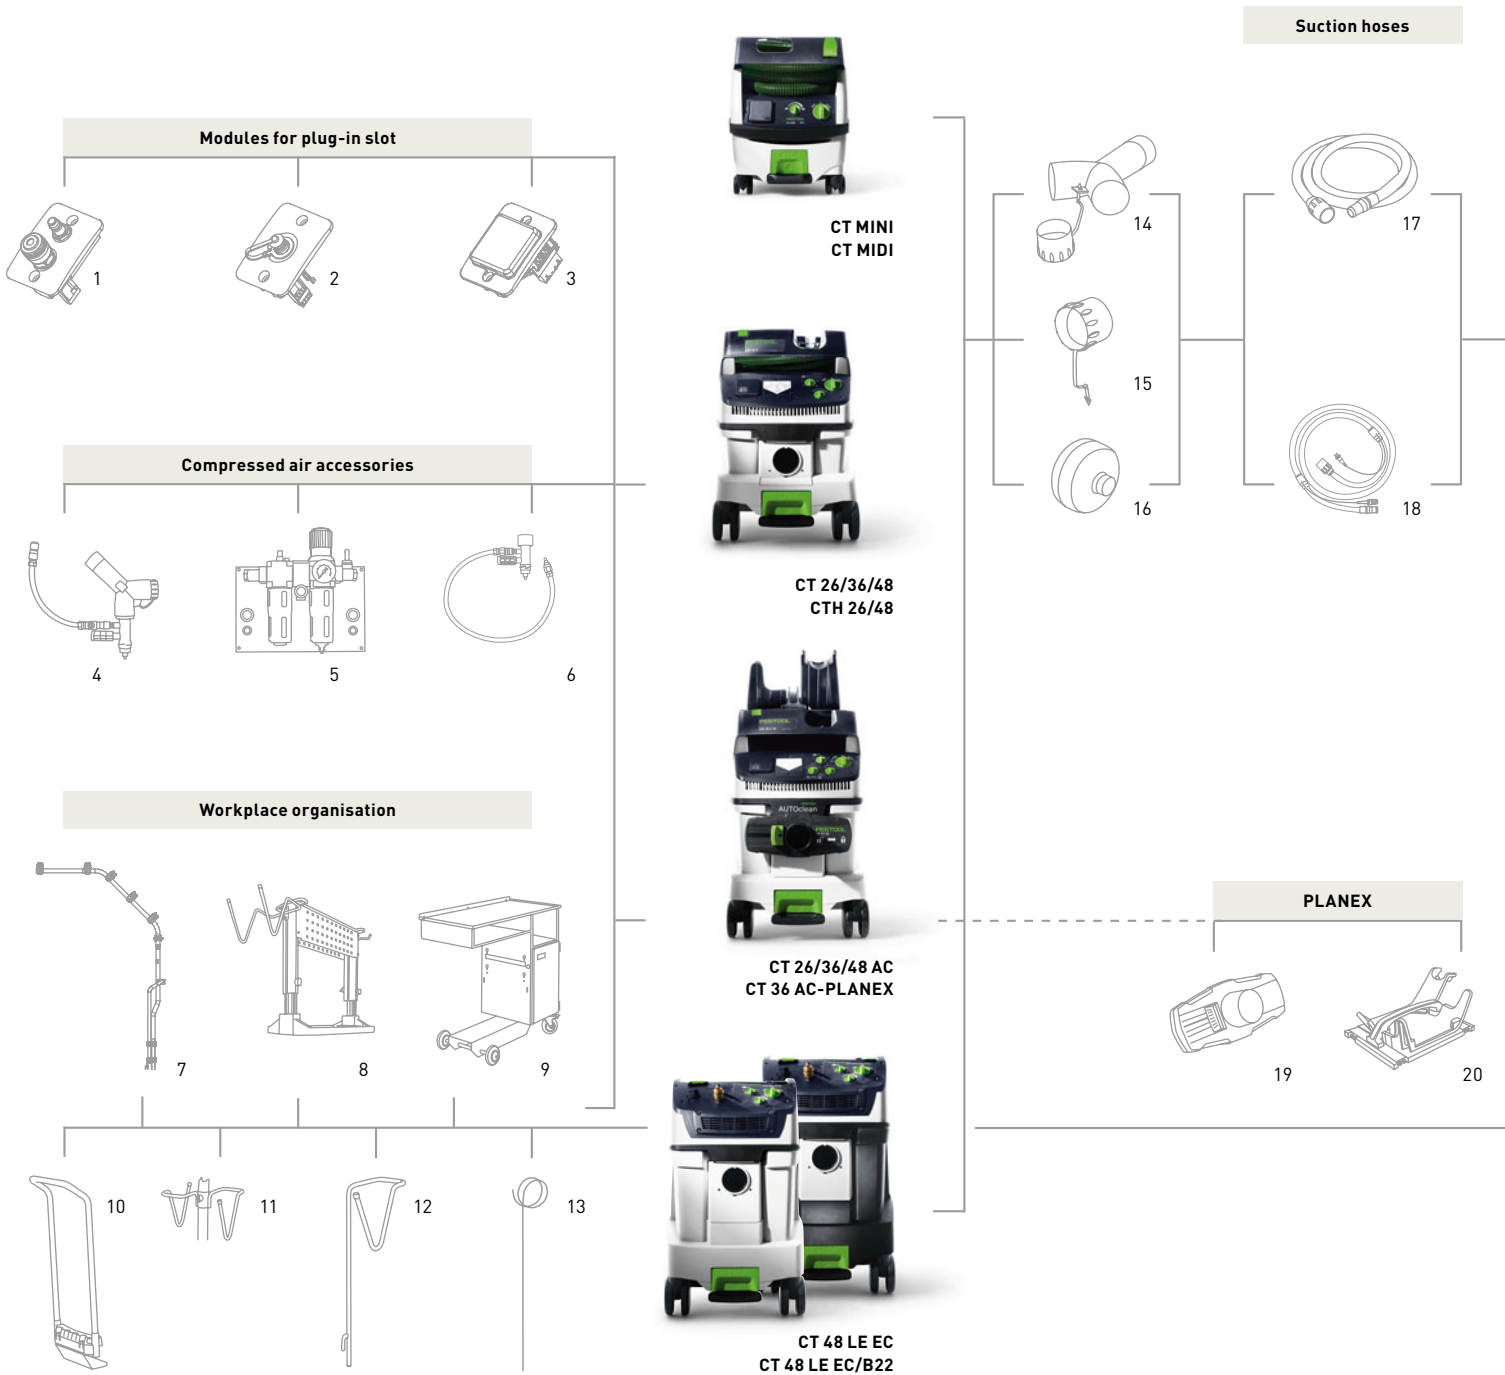





For more system accessories and consumables,  
see [www.festool.com.au](http://www.festool.com.au) or the main catalogue.

### Hose connectors



21



22



23



24




25



26

### Tubes



27



28



29

### Nozzles and brushes



30




31




32




33




34



35




36




37




38



39




40



41

### Filters



42



43




44



45



46



47

### Filter bags


## Package contents and order numbers.

CT	Container capacity	Dust class	Electronic	Compressed air	AUTOCLEAN	EC-TEC motor
CLEANTEK	26, 36, 48	L, M, H, B22	E	LE	AC	EC

Mobile dust extractor CT MINI   CT MIDI Package contents	Order no.	L	M	H	LE	AC	EC	B22
SELFCLEAN filter bag, spare filter bag in storage compartment, suction hose Ø 27 x 3.5 m-AS with angular rotating adapter on the extractor end, in carton								
<b>CTL MINI</b>	<b>583359</b>	●						
<b>CTL MIDI</b>	<b>583375</b>	●						

Mobile dust extractors CT 26/36/48   CT 36/48 AC   CT 36 AC-PLANEX Package contents	Order no.
SELFCLEAN filter bag, suction hose Ø 27 x 3.5 m-AS, hose garage, cord holder, in carton	
<b>CTL 26 E HEPA</b>	<b>583494</b>
<b>CTM 26 E</b>	<b>583848</b>
<b>CTL 36 E HEPA</b>	<b>583495</b>
<b>CTL 36 E LE</b> + compressed air module with LE port	<b>583846</b>
<b>CTL 36 E AC</b> + waste bag	<b>584016</b>
<b>CTL 36 E AC-PLANEX</b> + waste bag, compressed air module with LE port, kink-resistant hose Ø 36 x 3.5 m-AS/LHS 225, ComfortClean closing slide, PLANEX tool holder	<b>584063</b>
<b>CTM 36 E</b>	<b>584000</b>
<b>CTL 48 E</b> + handle	<b>584071</b>
<b>CTL 48 E LE</b> + handle, compressed air module with LE port	<b>584078</b>
<b>CTM 48 E</b> + handle	<b>584080</b>
<b>CTM 48 E LE</b> + handle, compressed air module with LE port	<b>584082</b>

Special application dust extractors Package contents	Order no.
<b>CTH</b> two-layer safety filter bag, suction hose Ø 27 x 3.5 m-AS, hose garage, cord holder, in carton	
<b>CTH 48 E</b> + handle	<b>584142</b>
<b>CT 48 E LE EC</b> compressed air and EAA port, SELFCLEAN filter bag, suction hose Ø 27 x 3.5 m-AS, cord holder, in carton	
<b>CTM 48 E LE EC</b>	<b>584132</b>
<b>CT 48 E LE EC/B22</b> compressed air and EAA port, SELFCLEAN filter bag, suction hose Ø 27 x 3.5 m-AS, cord holder, in carton	
<b>CTM 48 E LE EC/B22</b>	<b>584144</b>

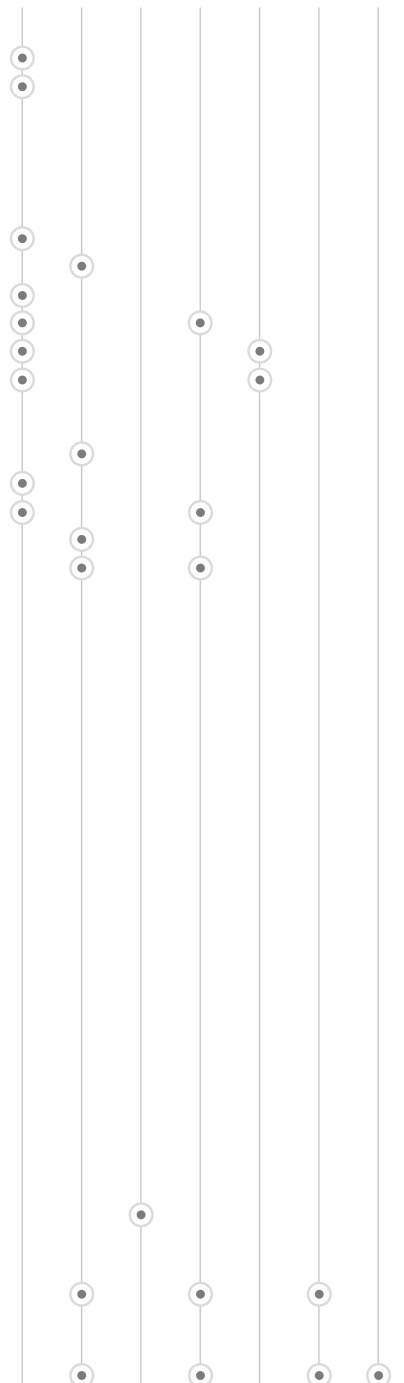

Design approval	Degree of filtration, filter system	Suitability
Dust class L <sup>1)</sup>	> 99 %	Hazardous dusts with max. permitted concentration <sup>3)</sup> > 1 mg/m <sup>3</sup>
Dust class M <sup>1)</sup>	> 99.9 %	Hazardous dusts with max. permitted concentrations <sup>3)</sup> > 0.1 mg/m <sup>3</sup>
Dust class H <sup>1)</sup>	> 99.995 %	Hazardous dusts with max. permitted concentrations <sup>3)</sup> > 0.1 mg/m <sup>3</sup>
Mobile dust extractors, type 22 <sup>2)</sup> , dust class M	> 99.9 %	Combustible dust from explosion classes ST1, ST2 and ST3 in Zone 22

<sup>1)</sup> Source: EN 60335-2-69 and IEC 60335-2-69 Annex AA <sup>2)</sup> Source: EN 60335-2-69 and IEC 60335-2-69 Annex CC

<sup>3)</sup> For maximum permitted concentrations, observe the relevant national regulations, such as TRGS 900 in Germany.

	Modules for plug-in slot* Package contents	Order no.
1	<b>Compressed air module DL CT 26/36/48</b> for CT/CTL/CTM 26/36/48, for installation on LE-model mobile dust extractors; with additional automatic air switch-on/shut-off	<b>496141</b>
2	<b>Energy box module EAA CT 26/36/48</b> for CT/CTL/CTM 26/36/48, for connecting a CT mobile dust extractor to the energy box or boom arm; mobile dust extractor must not be LE model; in carton	<b>496143</b>
3	<b>Electrical outlet module</b> for CT/CTL/CTM 26/36/48 <b>Module SD CT 26/36/48</b> electrical outlet with continuous power	<b>496142</b>
	<b>Module SD E/A CT 26/36/48</b> electrical outlet with automatic switch-on/shut-off	<b>496405</b>

\* Not for CT 48 LE EC or CT 48 LE EC/B22

	Compressed air accessories Package contents	Order no.
4	<b>IAS 2 double adapter IAS 2-DA-CT</b> for simultaneous connection of 2 IAS 2 compressed air tools that are alternately operated (additional connector IAS 2-A-ASA/CT/SRM45/70 [454757] required), not for CT MINI/CT MIDI, outside diameter of cone 58 mm, in carton	<b>496929</b>
5	<b>Service unit VE-CT 26/36/48</b> for CT 26/36/48 in the LE version, quick-release condensate drain, pressure regulator, lubricator and non-lubricated air outlet with quick coupling, in carton	<b>495886</b>
6	<b>IAS 2 adapter IAS 2-A-ASA/CT/SRM45/70</b> for CT dust extractors, for EAA in EW/DW version, for connection to IAS 2 hoses, integrated connector for compressed air supply via compressed air connection hose, antistatic model, not for CT MINI/CT MIDI, outside diameter of cone 58 mm, in carton	<b>454757</b>

	Workplace organisation Package contents	Order no.
7	<b>CT boom arm</b> Tube set with connectors, length 2119 mm, width 1136 mm, in carton <b>CT-ASA CT 26/36 SB</b> for CT/CTL/CTM 26/36, with handle SB-CT 26/36	<b>496372</b>
	<b>CT-ASA CT 44/48/55</b> for CT/CTL/CTM 48	<b>492452</b>
8	<b>Workcenter WCR 1000</b> compact mobile workstation with storage shelf, storage tray, storage base for pegboard, double tool hook, universal hook, 6 standard hooks (125 mm long), 2 pegboards with square holes, Systainer holder, in carton	<b>497471</b>
9	<b>Toolcenter TC 3000/2</b> mobile workstation with large work and storage area, lockable tool cabinet with intermediate shelf for storing Systainers and Sortainers, extractor dock with extractor mount for CT/CTL/CTM 26/36/48 with strap (accessory)	<b>583881</b>
10	<b>Handle</b> with nozzle holder ZBA-D <b>SB-CT 26/36</b> for CT/CTL/CTM 26/36 <b>SB-CT 48</b> for CT/CTL/CTM 48	<b>495802</b> <b>497295</b>
11	<b>Tool holder WHR/CT-ASA</b> for CT-ASA, CT-ASA/SB for secure and ergonomic storage of two electric or air tools, in high-grade stainless steel	<b>493558</b>
12	<b>Tool holder WHR-CT</b> for CT/CTL/CTM 26/36/48 for secure and ergonomic storage of electric or air tools, in high-grade stainless steel	<b>496122</b>
13	<b>Hose holder SHR-CT/SR</b> for CT/CTL/CTM 26, 36, 48 prevents tripping over hoses lying on the floor, in carton	<b>487072</b>

	Accessories Package contents	Order no.
14	<b>Y-piece, antistatic D 50 SV-AS/D 50 V</b> for D 50/D 36/D 27, with plug, for connection of two suction hoses; simultaneous operation is not permitted on dust extractors with approval for hazardous dust	<b>452898</b>
15	<b>Plug D 50/V</b> for closing off the inlet connection, for retrofit on CT/CTL 26, CT/CTL 36, CT/CTL 48	<b>452899</b>
16	<b>Spark trap D 50 FL</b> for CT/CTL/CTM, in carton	<b>484733</b>



	<b>Suction hoses</b> Package contents	Order no.
17	<b>Suction hoses, antistatic version</b> temperature-resistant up to + 70°C, bleeder resistor (DIN IEC 312) < 10 MΩ, in carton	
	<b>D 22x3.5m-AS</b> Ø 22 mm, with rotating angle adapter and reducing sleeve, high flexibility: ideal for PS/LS/ETS/RTS/DTS/RS300/DX, length 3.5 m	<b>456745</b>
	<b>D 27x3.5m-AS</b> Ø 27 mm, with rotating adapter and reducing sleeve, length 3.5 m	<b>452878</b>
	<b>D 27x5m-AS</b> Ø 27 mm, with rotating adapter and reducing sleeve, length 5 m	<b>452880</b>
	<b>D 36x3.5m-AS</b> Ø 36 mm, with rotating adapter and reducing sleeve, length 3.5 m	<b>452882</b>
	<b>D 36x5m-AS</b> Ø 36 mm, with rotating adapter and reducing sleeve, length 5 m	<b>452884</b>
	<b>D 36x7m-AS</b> Ø 36 mm, with rotating adapter and reducing sleeve, length 7 m	<b>452886</b>
	<b>D 36x3.5-AS/KS/LHS 225</b> Ø 36 mm, for PLANEX long-reach sander, highly flexible, kink-resistant suction hose, length 3.5 m	<b>496972</b>
	<b>D 36/32x3.5m-AS</b> Ø 36/32 mm, for CT26/36 AC, ideal for work with masonry renovator and for cleaning jobs, tapered suction hose, length 3.5 m	<b>497925</b>
	<b>D 50x2.5m-AS</b> Ø 50 mm, with 2x rotating adapter, length 2.5 m	<b>452888</b>
	<b>D 50x4m-AS</b> Ø 50 mm, with 2x rotating adapter, length 4 m	<b>452890</b>
	<b>Suction hoses</b> temperature-resistant up to + 70°C, in carton	
	<b>D 27x3.5m</b> Ø 27 mm, with rotating adapter and reducing sleeve, length 3.5 m	<b>452877</b>
	<b>D 27x5m</b> Ø 27 mm, with rotating adapter and reducing sleeve, length 5 m	<b>452879</b>
	<b>D 36x3.5m</b> Ø 36 mm, with rotating adapter and reducing sleeve, length 3.5 m	<b>452881</b>
	<b>D 36x5 m</b> Ø 36 mm, with rotating adapter and reducing sleeve, length 5 m	<b>452883</b>
	<b>D 36x7 m</b> Ø 36 mm, with rotating adapter and reducing sleeve, length 7 m	<b>452885</b>
	<b>D 50x2.5m</b> Ø 50 mm, with 2x rotating adapter, length 2.5 m	<b>452887</b>
	<b>D 50x4m</b> Ø 50 mm, with 2x rotating adapter, length 4 m	<b>452889</b>
	<b>Suction hose by the metre</b> temperature-resistant up to + 70°C, without rotating adapter or reducing sleeve, length – m	
	<b>D 27 MW-AS</b> Ø 27 mm, antistatic, bleeder resistor (DIN IEC 312) < 10 MΩ	<b>452384</b>
	<b>D 36x3.5m-AS</b> Ø 36 mm, antistatic, bleeder resistor (DIN IEC 312) < 10 MΩ	<b>452385</b>
	<b>D 50 MW-AS</b> Ø 50 mm, antistatic, bleeder resistor (DIN IEC 312) < 10 MΩ	<b>452386</b>
	<b>D 27 MW</b> Ø 27 mm	<b>452383</b>
	<b>D 36 MW</b> Ø 36 mm	<b>454157</b>
	<b>D 50 MW</b> Ø 50 mm	<b>454158</b>
18	<b>Suction hose, "plug it"</b> <b>D 27x3.5m-AS</b> Ø 27 mm, with plug it connector, length 3.5 m	<b>456746</b>

	<b>PLANEX accessories</b> Package contents	Order no.
19	<b>Closing slide VS-CT AC/SRM45 PLANEX</b> for CT AC/CT 36 PLANEX, creates extreme vacuum in the container for even more thorough cleaning of the filter, in carton	<b>497926</b>
20	<b>Tool holder WHR-CT 36-LHS 225</b> for CT 36 PLANEX, with practical carry handle, for storage of PLANEX, in carton	<b>495964</b>

	<b>Hose connectors   Tubes</b> Package contents	Order no.
21	<b>Rotating adapter</b> hose connector for connection to the inlet on the dust extractor, external Ø 58 mm	
	<b>D 27 DAG-AS</b> for antistatic suction hose D 27	<b>452892</b>
	<b>D 36 DAG-AS</b> for antistatic suction hose D 36	<b>452894</b>
	<b>D 50 DAG-AS</b> for antistatic suction hose D 50	<b>452896</b>
	<b>D 27 DAG</b> for suction hose D27	<b>452891</b>
	<b>D 36 DAG</b> for suction hose D36	<b>452893</b>
	<b>D 50 DAG</b> for suction hose D 50	<b>452895</b>
22	<b>Antistatic rotating angle adapter D 27 DAG/90°-AS</b> for antistatic suction hose D 22 and D 27 on CTL MINI/CTL MIDI	<b>456806</b>
23	<b>Reducing sleeve, antistatic</b> for suction-side connections (electric tool or suction nozzle)	
	<b>D 22 DM-AS</b> for suction hose D 22	<b>456756</b>
	<b>D 27 DM-AS</b> for suction hose D27	<b>487071</b>
	<b>D 36 DM-AS</b> for suction hose D36	<b>487721</b>
	<b>Reducing sleeve RM D36/D27-AS</b> for suction hose D 36, for reducing to D 27	<b>498528</b>
24	<b>Reducing sleeve, antistatic D 36 DM-AS-LHS 225</b> for suction hose D 36, for PLANEX long-reach sander, for suction-side connection (electric tool or suction nozzle)	<b>495013</b>
25	<b>Extraction adapter D 50/D 36 AA</b> for connecting a D 50 suction hose with D 36 accessories	<b>452897</b>
26	<b>Antistatic connector sleeve D 50/D 50 VM-AS</b> for joining suction hoses D 50/D 36/D 27; with D 27/D 36 hoses the reducing sleeve on one hose must be replaced by the rotating adapter D 27/D 36	<b>493047</b>
27	<b>Extension tube</b>	
	<b>D 36 VR-M 3x</b> stainless steel, 3-piece, compatible with D 27 and D 36, length 950 mm	<b>452902</b>
	<b>D 36 VR-K 3x</b> polypropylene (PP), 3-piece, compatible with D 27 and D 36, length 950 mm	<b>452903</b>
	<b>D 50 VR-M</b> anodised aluminium, 1-piece, compatible with D 50, length 1100 mm, in carton	<b>447599</b>
	<b>D 50 VR-K 2x</b> plastic, 2-piece, compatible with D 50, length 970 mm, in carton	<b>440412</b>
28	<b>Hand tube D 36 HR-M</b> compatible with D 27 and D 36, curved, stainless steel	<b>452900</b>
29	<b>Hand tube D 36 HR-K</b> compatible with D 27 and D 36, curved, polypropylene (PP), with air regulator slide for suction power adjustment	<b>452901</b>

	<b>Nozzles   Brushes</b> Package contents	Order no.
30	<b>Crevice nozzle</b> for CT/CTL/CTM 26/36/48	
	<b>D 36 FD-300</b> plastic, compatible with D 27 and D 36, length 300 mm	<b>452904</b>
	<b>D 36 FD-210</b> plastic, compatible with D 27 and D 36, length 210 mm	<b>492391</b>
31	<b>Crevice nozzle D 50 FD</b> compatible with D 50, length 200 mm	<b>452912</b>
32	<b>Suction brush</b>	
	<b>D 36 SP</b> compatible with D 27 and D 36, Ø 70 mm	<b>440404</b>
	<b>D 50 SP</b> compatible with D 50, Ø 85 mm	<b>440419</b>
33	<b>Universal brush nozzle D 36 UBD</b> plastic, with brush ring and rotary hinge, compatible with D 27 and D 36	<b>498527</b>
34	<b>Bevel-ended nozzle D 36 SRD</b> rubber, compatible with D 27 and D 36, length 190 mm, diameter 40 mm	<b>411810</b>
35	<b>Upholstery nozzle D 36 PD</b> plastic, with brush strip, compatible with D 27 and D 36, width 120 mm	<b>440406</b>
36	<b>Flat nozzle D 36 FDG</b> special rubber, oil-resistant, compatible with D 27 and D 36, width 100 mm	<b>440408</b>

	Nozzles   Brushes Package contents	Order no.
37	<b>Floor nozzles</b>	
	<b>D 36 BD 370</b> industrial version, aluminium, with 2 castors and 2 brush strips, compatible with D 27 and D 36, width 370 mm	<b>452908</b>
	<b>D 50 BD 450</b> industrial version, aluminium, with 2 castors and 2 brush strips, compatible with D 50, width 450 mm, in carton	<b>452910</b>
	<b>D 36 BD 300</b> plastic, with 2 castors and 2 brush strips, compatible with D 27 and D 36, width 300 mm	<b>452907</b>
	<b>D 50 BD 370</b> plastic, with 2 castors and 2 brush strips, compatible with D 50, width 370 mm, in carton	<b>452909</b>
	<b>D 36 BD 270</b> 4-piece, plastic with 3 interchangeable inserts (brushes, rubber lips, carpet), compatible with D 27 and D 36, width 270 mm	<b>452906</b>
38	<b>Carpet nozzle D 36 TD</b> with glide plate, switchable between textile flooring and hard floors, compatible with D 27 and D 36	<b>452911</b>
39	<b>Turbo combination suction brush D 36 TKB</b> for textile flooring/hard floors, with 4 castors, brush roller driven by suction airflow, compatible with D 27 and D 36, width 270 mm, in carton	<b>450644</b>
40	<b>Cleaning sets</b>	
	<b>Cleaning set D 27/D 36 D-RS</b> crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, suction brush D 36 SP	<b>492392</b>
	<b>Standard cleaning set D 27/D 36 S-RS</b> curved hand tube D 36 HR-K, 3 extension tubes D 36 VR-K, floor nozzle 4-piece D 36 BD270, crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, in carton	<b>492389</b>
	<b>Professional cleaning set D 27/D 36 P-RS</b> curved hand tube D 36 HR-M, 3-piece stainless steel extension tube D 36 VR-M, switchable floor nozzle D 36 TD, crevice nozzle D 36 FD-210, in carton	<b>492390</b>
	<b>Compact cleaning set D 27/D 36 K-RS-Plus</b> curved hand tube D 36 HR-K, 3 extension tubes D 36 VR-K, floor nozzle 4-piece D 36 BD270, crevice nozzle D 36 FD, upholstery nozzle D 36 PD, in a SYSTAINER SYS 1 T-LOC	<b>497697</b>
	<b>Cleaning set for tradesmen D36 HW-RS-Plus</b> suction hose antistatic version D 36 x 3.5m-AS, curved hand tube D 36 HR-M, 3 extension tubes D 36 VR-M, carpet nozzle D 36 TD, crevice nozzle D 36 FD, upholstery nozzle D 36 PD, suction brush D 36 SP, in a SYSTAINER SYS 5 T-LOC	<b>497700</b>
	<b>Cleaning set for the workshop D36 WB-RS-Plus</b> suction hose antistatic version D36 x 3.5m-AS, curved hand tube D 36 HR-M, 3 extension tubes D 36 VR-M, floor nozzle D 36 BD370, in a SYSTAINER SYS 5 T-LOC	<b>497701</b>
	<b>Universal cleaning set D36 UNI-RS-Plus</b> suction hose D 36 x 3.5 m-AS, curved hand tube D 36 HR-K, 3 extension tubes D 36 VR-K, carpet nozzle D 36 BD300, crevice nozzle D 36 FD, suction brush D 36 SP, upholstery nozzle D 36 PD, in a SYSTAINER SYS 5 T-LOC	<b>497702</b>
	<b>Cleaning set for industrial use D 50 GS-RS</b> suction hose Ø 50 x 2.5 m, 2 extension tubes D 50 VR-K, floor nozzle D 50 BD370, square nozzle D 50 QD, suction brush D 50 SP, crevice nozzle D 50 FD, in carton	<b>454770</b>
	<b>Masonry renovation cleaning set D36 RS-M-Plus</b> curved hand tube D 36 HR-M, 3 extension tubes D 36 VR-M, carpet nozzle D 36 TD, crevice nozzle D 36 FD, upholstery nozzle D 36 SP, in a SYSTAINER SYS 2 T-LOC	<b>497698</b>
	<b>Floor cleaning set D 36 BD 370 RS-Plus</b> curved hand tube D 36 HR-M, 3 extension tubes D 36 VR-M, floor nozzle D 36 BD 370, in a SYSTAINER SYS 2 T-LOC	<b>497699</b>

	Nozzles   Brushes Package contents	Order no.
41	<b>Nozzle and tube accessory storage</b>	
	<b>Set ZBA-D CT26/36</b> for CT/CTL/CTM 26/36, accessory storage for nozzles with crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, suction brush D 36 SP	<b>496369</b>
	<b>ZBA-D CT26/36</b> for CT/CTL/CTM 26/36, for storage of 1 floor nozzle D27/36 and up to 4 other nozzles	<b>496373</b>
	<b>ZBA-D/R CT26/36/48</b> for CT/CTL/CTM 26/36/48, for storage of curved hand tube, 3-piece extension tubes, floor nozzle and up to four other nozzles	<b>496370</b>

	Filters Package contents	Order no.
42	<b>Main filters</b> In a box	
	<b>HF-CT-MINI/MIDI</b> for CT/CTL MINI, CT/CTL MIDI, qty. in pack: 1	<b>456790</b>
	<b>HF-CT 26/36/48</b> for CT/CTL/CTM 26/36/48, qty. in pack: 1, not suitable for CT with AUTOCLEAN	<b>496170</b>
	<b>High Performance HF-CT 26/36/48</b> for CT AC, cleaning-optimised main filter	<b>496172</b>
	<b>HEPA HF-CT 26/36</b> for CT/CTL/CTM 26/36/48, HEPA class 13, qty. in pack: 1	<b>496171</b>
	<b>HF-CTH 26/48</b> for CTH 26/48, qty. in pack: 1	<b>498331</b>
43	<b>Wet filters</b>	
	<b>NF-CT MINI/MIDI</b> for CT/CTL MINI, CT/CTL MIDI, qty. in pack: 1	<b>456805</b>
	<b>NF-CT 26/36/48</b> for CT/CTL/CTM 26/36/48, qty. in pack: 1	<b>496169</b>

	Filter bags Package contents	Order no.
44	<b>SELCLEAN filter bag</b> optimum utilisation of the filter bag capacity and constant high suction power thanks to SELCLEAN filter bag, qty. in pack: 5, in carton	
	<b>SC FIS-CT MINI/5</b> for CT/CTL MINI	<b>498410</b>
	<b>SC FIS-CT MIDI/5</b> for CT/CTL MIDI	<b>498411</b>
	<b>SC FIS-CT 26/5</b> for CT/CTL/CTM 26	<b>496187</b>
	<b>SC FIS-CT 36/5</b> for CT/CTL/CTM 36	<b>496186</b>
	<b>SC FIS-CT 48/5</b> for CT/CTL/CTM 48	<b>497539</b>
45	<b>Two-layer safety filter bag</b> made from highly flexible non-woven filter bag and a 2nd layer of PE material, meets the requirements of dust class H, qty. in pack: 3, in carton	
	<b>FIS-CTH 26/3</b> for CTH 26	<b>497541</b>
	<b>FIS-CTH 48/3</b> for CTH 48	<b>497542</b>
46	<b>Longlife filter bag</b> made from high-strength, long-life, 3-ply non-woven polyester, only for use when vacuuming non-hazardous dust, qty. in pack: 1, in carton	
	<b>Longlife FIS-CT 26</b> for CT/CTL/CTM 26	<b>496120</b>
	<b>Longlife FIS-CT 36</b> for CT/CTL/CTM 36	<b>496121</b>
	<b>Longlife FIS-CT 48</b> for CT/CTL/CTM 48	<b>498506</b>
47	<b>Waste bag</b> qty. in pack: 5, in carton	
	<b>ENS-CT 26 AC/5</b> for CT/CTL/CTM 26 AC	<b>496216</b>
	<b>ENS-CT 36 AC/5</b> for CT/CTL/CTM 36 AC	<b>496215</b>
	<b>ENS-CT 48 AC/5</b> for CT/CTL/CTM 48 AC	<b>497540</b>

# FESTOOL

Tools for the toughest demands

## Tooltechnic Systems (AUST) Pty Ltd

Postal address: PO Box 4401  
Dandenong South VIC 3164  
Australia  
Phone: 03 9799 9733  
Fax: 03 8795 9221  
Service Hotline: 1800 063 900  
E-mail: [sales@tooltechnic.com.au](mailto:sales@tooltechnic.com.au)  
Website: [www.festool.com.au](http://www.festool.com.au)

## Tooltechnic Systems (NZ) Ltd

27 Greenmount Drive, East Tamaki  
Postal address: PO Box 258-078  
Botany, Manukau 2163, Auckland  
New Zealand  
Free call: 0800 337 8665  
Phone: (09) 272 2220  
Fax: (09) 272 2230  
E-mail: [sales@festool.co.nz](mailto:sales@festool.co.nz)  
Website: [www.festool.co.nz](http://www.festool.co.nz)



Our tools live up to the claim "Made in Germany" –  
Tools for the toughest demands.  
Visit [www.festool.com.au](http://www.festool.com.au) for more information



Festool service: Extended 3 year warranty and free  
pick-up service. Visit [www.festool.com.au](http://www.festool.com.au) for  
more information



Built to last, recycling, waste prevention –  
for a cleaner environment.  
Visit [www.festool.com.au](http://www.festool.com.au) for more information

[www.festool.com.au](http://www.festool.com.au)

Dealer

Festool  
Dust extraction  
Valid 04/2011

Order no. 61514

